

HARMSCO®

Premium Hurricane® All-Poly Cartridges

Industrial Grade


Designed for Hurricane® and WaterBetter® Filter Housings

These high flow polypropylene cartridges are designed for most applications where absolute rated pleated filtration is needed. Designed to hold up to 75 sq.ft. of filtration media, our all-poly high flow cartridge is a great value. These cartridges are constructed with 100% polypropylene materials. Efficiency ratings to 99.98% (Beta 5000).

- **High flow capability**
- Lower overall operating cost**
- Reduces waste disposal**
- Longer filter runs for fewer change outs**
- Increased contaminate removal**

Features

- ▶ Fewer cartridges for fewer change outs and lower maintenance cost
- ▶ Pleated polypropylene filter media provides higher flow rates and lower initial pressure drop
- ▶ Pleated surface area provides higher loading capacity for longer filter life and increased particle removal
- ▶ Double o-ring end cap, center tube and media are thermally bonded as one integral component for added strength
- ▶ Offered in three sizes (40, 90, 170) and seven micron ratings (0.2, 0.45, 1, 5, 10, 20, 50) to meet all your high flow requirements

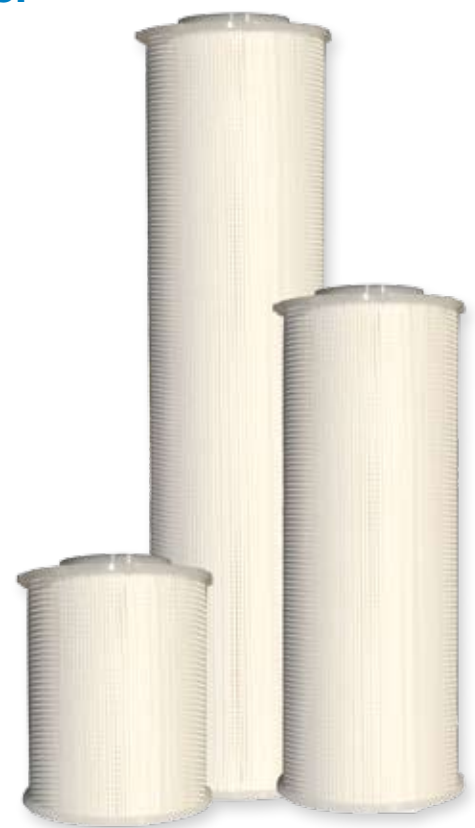

Hurricane® All-Poly Cartridges

Applications

- ▶ Acids and bases
- ▶ Glycol
- ▶ Machine coolants
- ▶ Organic solvents
- ▶ Photo chemical plating solutions
- ▶ Pre-filtration UF membranes
- ▶ Pre-filtration for DI resins
- ▶ Food & Beverage
- ▶ Bottled water
- ▶ Aqueous solutions
- ▶ Magnetic tape coatings
- ▶ Pre-filtration for RO
- ▶ Cosmetics
- ▶ Inks



HARMSCO® Filtration Products



Made in USA

Specifications

- ▶ **Filter media** - Polypropylene
- ▶ **Support Media** - Polypropylene
- ▶ **Outer Support Media** - Polypropylene
- ▶ **Temperature** - 180°F (82°C)
- ▶ **Sanitization/Sterilization**
 - Filtered hot water - 194°F (90°C)
 - Chemical Sanitization - industry standard concentrations of hydrogen peroxide, peracetic acid, sodium hypochlorite and other selected chemicals
- ▶ **End Caps** - Polypropylene
- ▶ **Center Core** - Polypropylene
- ▶ **O-Rings** - Silicone (standard), Buna, Viton
- ▶ **Change Out** - 35 PSI ΔP (2.4 bar)


FDA Listed Materials:

Manufactured from materials which are listed for food contact applications in Title 21 of the U.S. Code of Federal Regulations.

Cartridge Selection/Sizing Guide

7-3/4" O.D. - 100% polypropylene materials

Product Code	Absolute Micron Rating	Media (sq ft)	Recommended Flow Rate* (GPM)	Maximum Flow Rate* (GPM)	No./Case
All-Poly - for high flow applications requiring absolute rated filtration.					
HC-PP-40-0.2	0.2	25	17	19	1
HC-PP-40-0.45	0.45	25	17	19	1
HC-PP-40-1	1	25	17	19	1
HC-PP-40-5	5	25	17	19	1
HC-PP-40-10	10	25	17	19	1
HC-PP-40-20	20	25	17	19	1
HC-PP-40-50	50	25	17	19	1
HC-PP-90-0.2	0.2	50	35	38	1
HC-PP-90-0.45	0.45	50	35	38	1
HC-PP-90-1	1	50	35	38	1
HC-PP-90-5	5	50	35	38	1
HC-PP-90-10	10	50	35	38	1
HC-PP-90-20	20	50	35	38	1
HC-PP-90-50	50	50	35	38	1
HC-PP-170-0.2	0.2	75	40	76	1
HC-PP-170-0.45	0.45	75	40-65	76	1
HC-PP-170-1	1	75	65-100	76	1
HC-PP-170-5	5	75	65-100	76	1
HC-PP-170-10	10	75	65-100	76	1
HC-PP-170-20	20	75	65-100	76	1
HC-PP-170-50	50	75	65-100	76	1

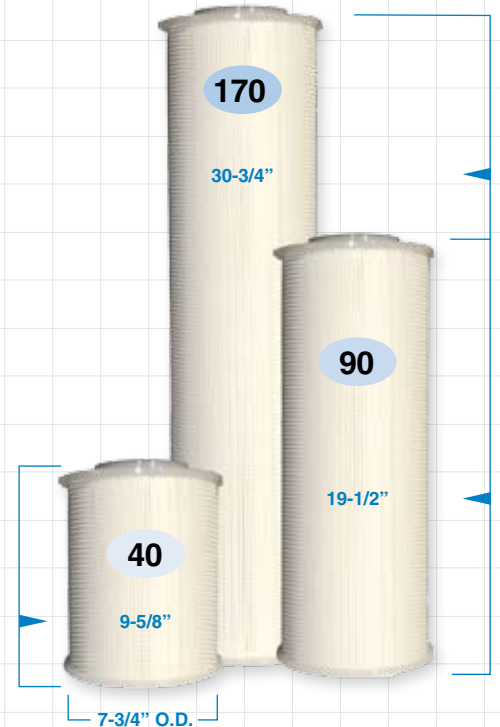


Hurricane® All-Poly Cartridges
Length and O.D.

Pressure Drop

Pressure Drop vs. Flow Rate

The total head loss data shown at right indicates pressure drop with Hurricane® 170 filter housing and Hurricane® All-Poly 170 filter cartridges in 5 different micron ratings in clean water.

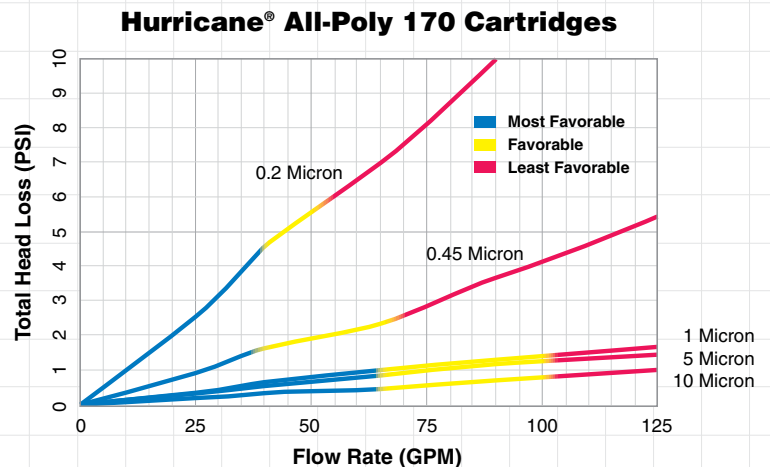

HARMSCO® Filtration Products

P.O. Box 14066, North Palm Beach, FL 33408

(561) 848-9628 • Toll-free: (800) 327-3248 • Fax: (561) 845-2474 • E-mail: sales@harmsco.com

www.harmsco.com



Made in USA

027A 5/10